SKU: ECLIPSE-6-SCB

•	a
Ť	ש

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 2	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	150 lbs
Gallons to Operate	60-75
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(2) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt.) 115v 20AMP GFCI Circuit

BATHERS: 1	
IN:	STALLATION
•	DECK (D)
	UNDER MOUNT (U)
	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

Jet & Control placement may vary



# STANDARD FEATURES & ACCESSORIES for SILVER COMBINATION

21 Air & Water Massage Jets Accumassage Back, Neck Jets Micro Flow Jets  $\dot{\odot}$ Classic Air Jets O

#### **PUMPS**

2.25 Hydropower 1-speed Pump 1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

### **CONTROLS**

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

## **PURITY**

HydroClean Water Purity System HydroCleanse

# STANDARD ACCESSORIES

Mood Light

Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome

**Deluxe Cushion Pillow** 

EZ Level Adjustable Legs

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

## **REQUIREMENTS**

Pump Locations: Select 2

Electrical: two 115v 20AMP GFCI Circuits

Tub should not be supported by the lip in any way.

Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:** 


OVALS: A template will be provided

**RECTANGLES:** Subtract 1" to 1.5" from length & width for hole cut out size


LIMITED LIFETIME WARRANTY CUL US ANSI **EZ CLEAN CAST ACRYLIC** 






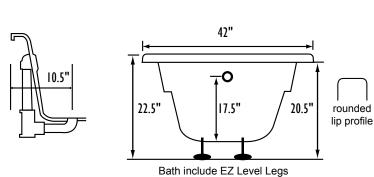

**INSTALLATION WILL NOT REQUIRE MORTAR BEDDING** 

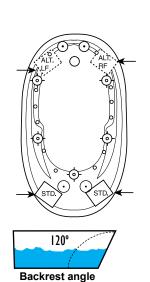

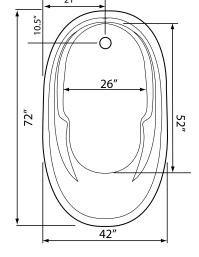

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site.

Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.