~~	•	.,	_	_
SO	А	ĸ	ᆮ	r

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s): N/A	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	150 lbs	
Gallons to Operate	60-75	
ELECTRICAL SPECIFICATIONS		
Motor/Pump	N/A	
Inline Stainless Steel Heater	N/A	

BATHERS: 1			
INSTALLATION			
٠	DECK (D)		
	UNDER MOUNT (U)		
	ALCOVE (A)		
	FREESTANDING (F)		
	CLAWFOOT (L)		
	PEDESTAL (P)		



STANDARD FEATURES & ACCESSORIES for SOAKER

STANDARD ACCESSORIES

EZ Level Adjustable Legs

REQUIREMENTS

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:**


OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size


EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY






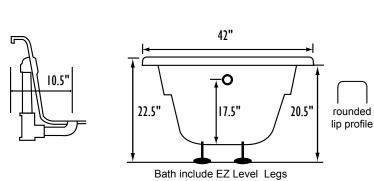

INSTALLATION WILL NOT REQUIRE MORTAR BEDDING





Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.